

ZTA Series 陶瓷谐振器



特性 (FEATURES)




- 频率范围: 1.79 ~ 60MHz
- Frequency range: 1.79 ~ 60MHz
- 低成本 Low cost
- 小尺寸、塑料封装 Low profile、pastic package
- 稳定性高 High stability



标准规格 (STANDARD SPECIFICATION)

Part Number	ZTA***MG	ZTAWs***MG	ZTALS***MG	ZTARS***MG	ZTA***MT	ZTA***MX
频率范围 (Frequency Range (Mhz))	1.79 ~ 6.00	1.79 ~ 6.00	3.00 ~ 8.00	3.00 ~ 10.00	6.00 ~ 13.00	12.00 ~ 60.00
频率精度 (Frequency Accuracy(at 25℃) (%))	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5	± 0.5
温度稳定性 (Stability in Temperature(-20~+80℃) (%))	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3
老化率 (10年) (Aging for 10 years(%))	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3	± 0.3
谐振电阻 (Resonator Resistance (Ω))	80	80	50	30	25	35
耐压 (Withstanding voltage(5seconds Max))	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC
二次温度系数 (Temperature Coefficient)	100VDC	100VDC	100VDC	100VDC	100VDC	100VDC
最小绝缘电阻 (Insulation Resistance Min.(at 10VDC))	500MΩ	500MΩ	500MΩ	500MΩ	500MΩ	500MΩ

OUTLINE DIMENSIONS

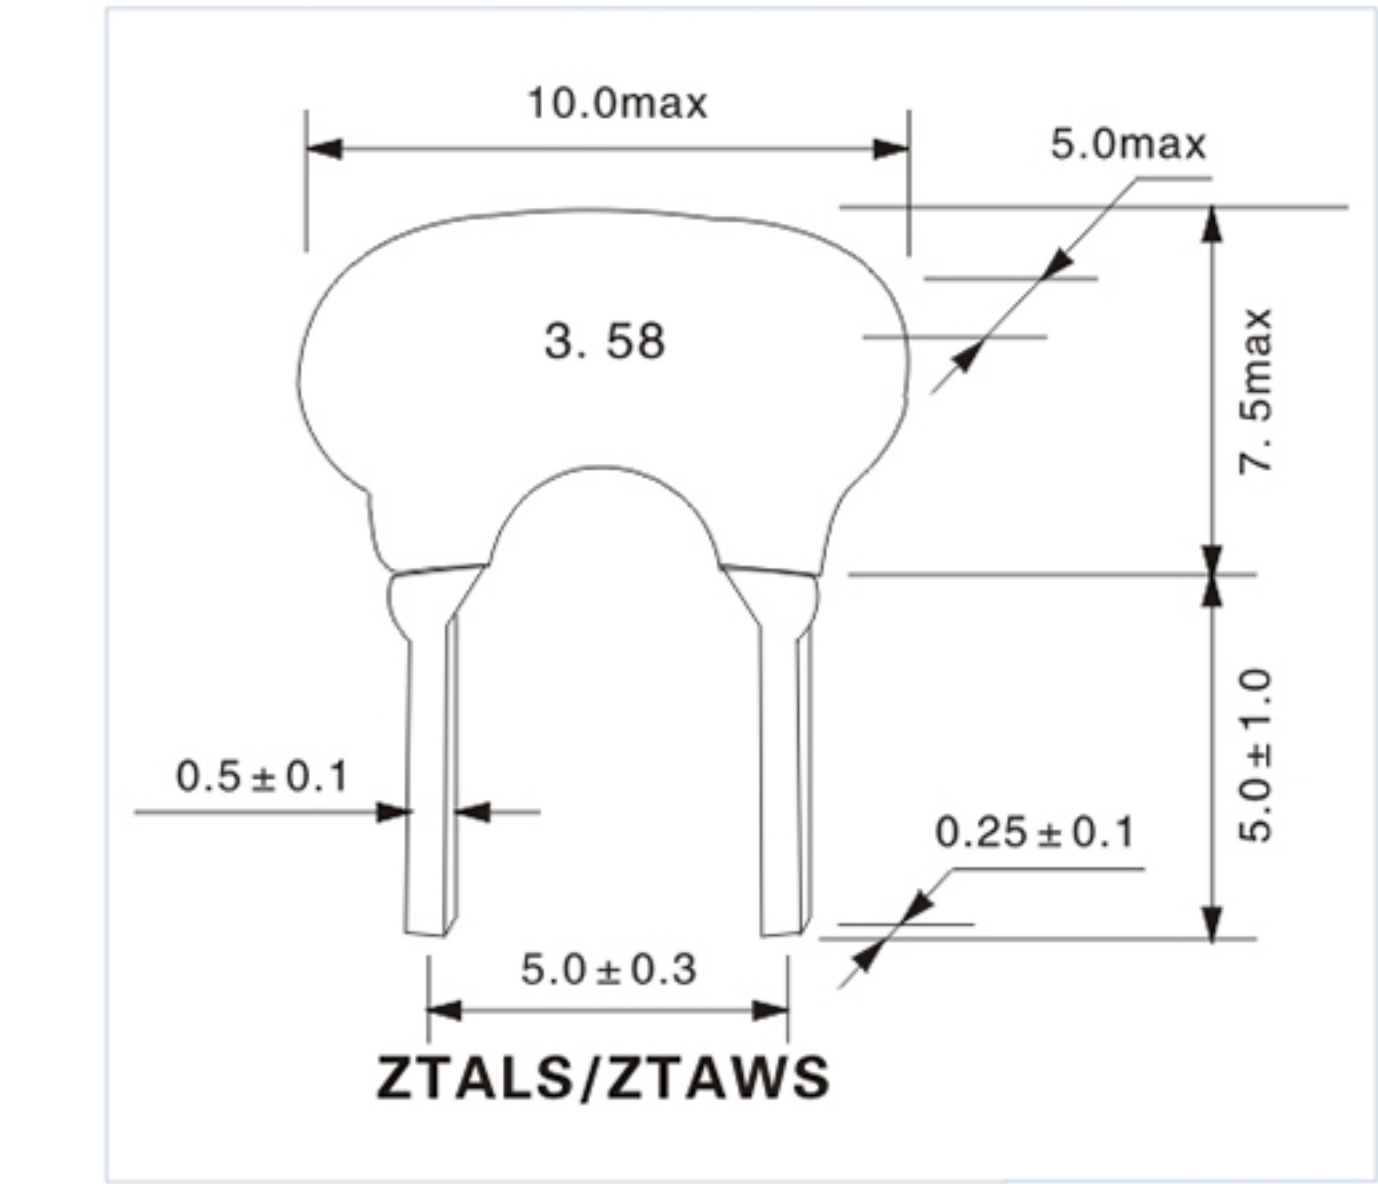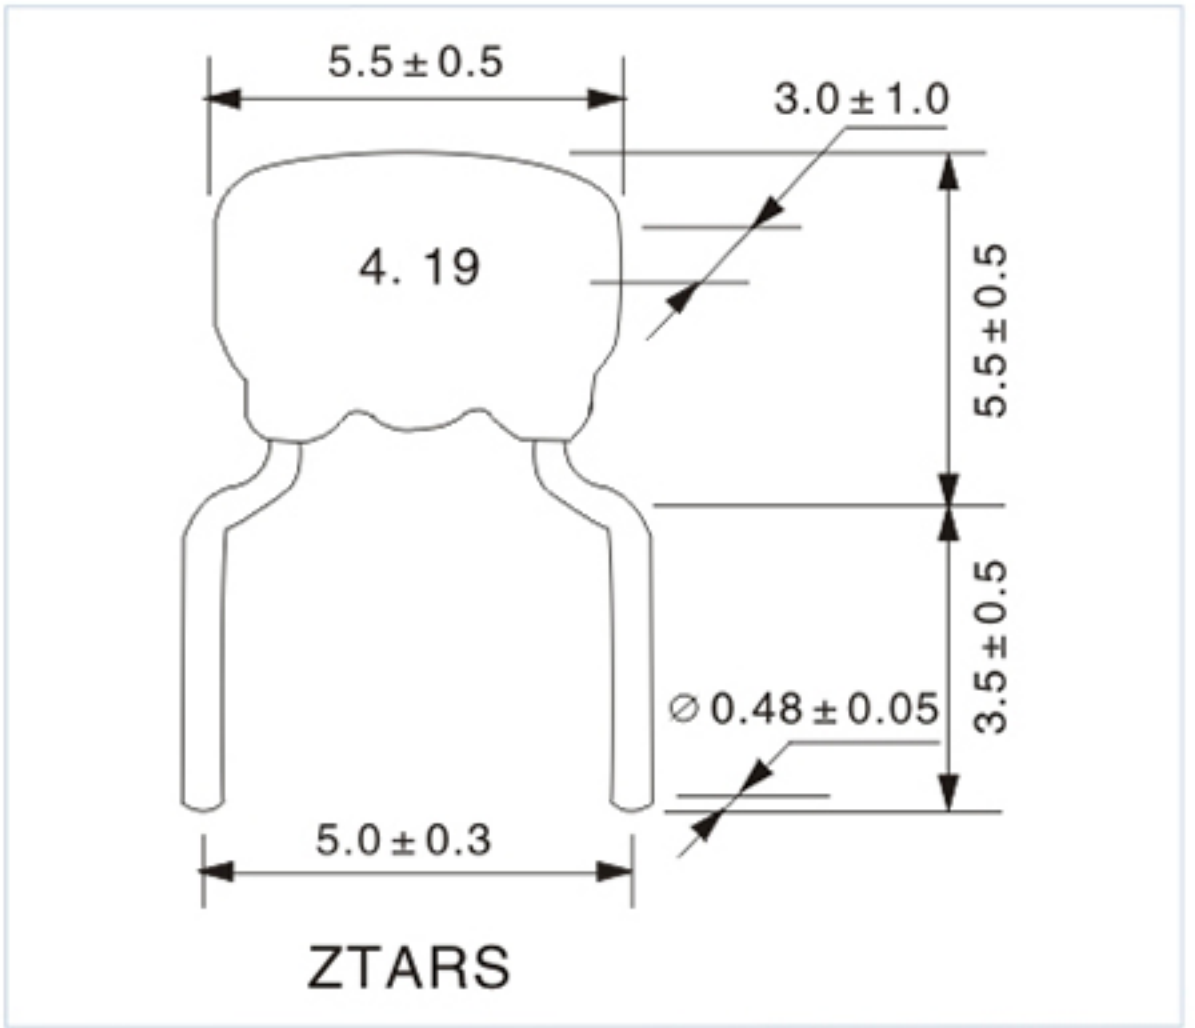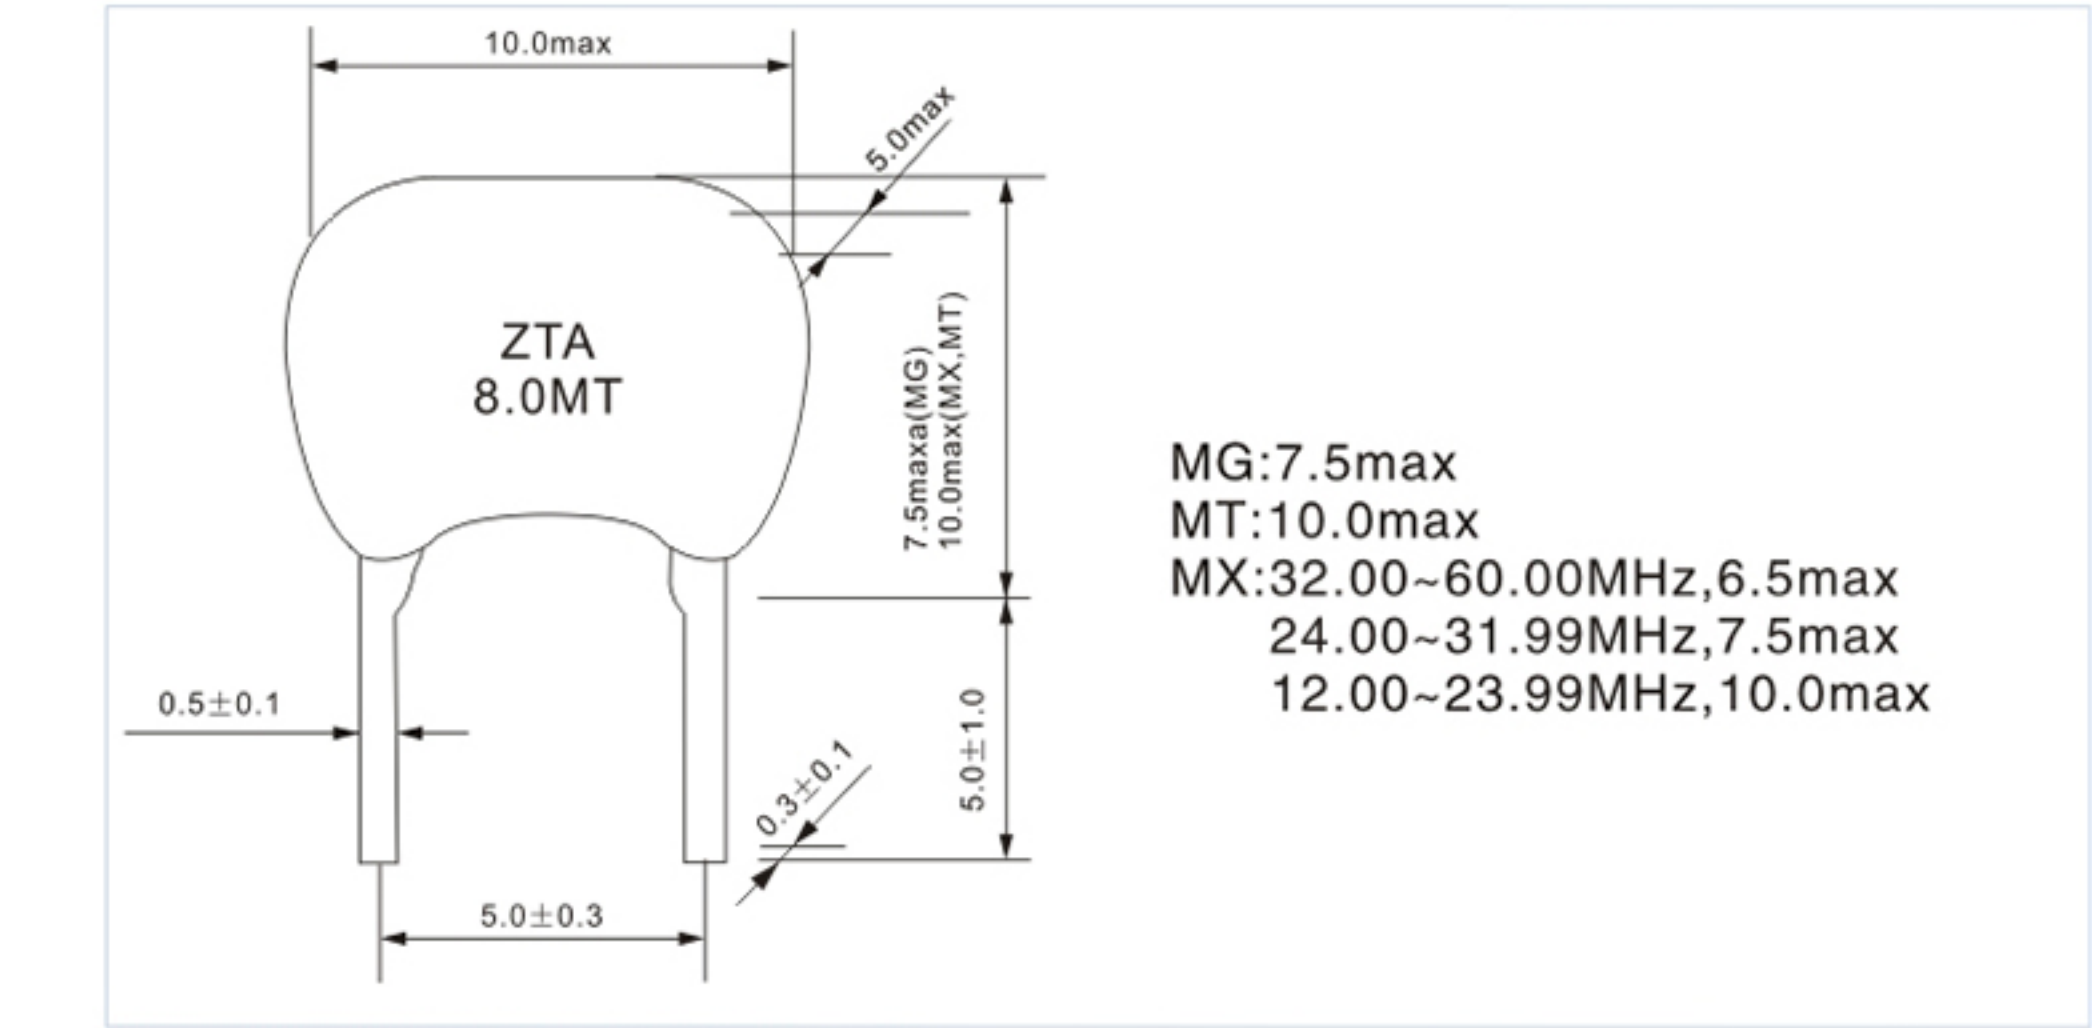

TEST CIRCUIT FOR MOSIC

